



GB04/1754



26

INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport

South Wales
NP1 0BQ 24 MAY 2004

WIPO PCT

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Andrew Gensey

Dated

12 May 2004

BEST AVAILABLE COPY

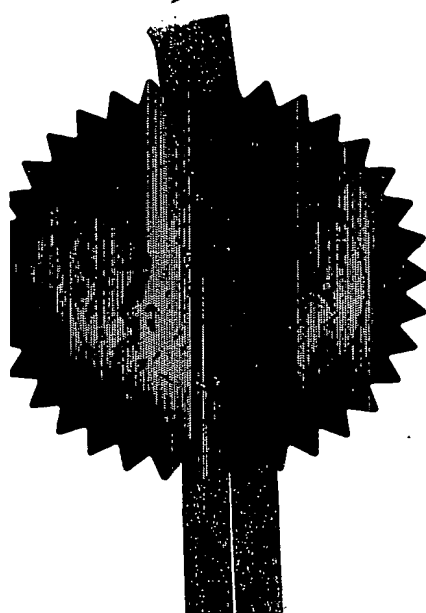

Patents Form 1/77

Patents Act 1977
(Rule 16)



29APR03 E803252-1 002855
P01/7700 0.00-0309624.5

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

2/P32667GB

2. Patent application number

(The Patent Office will fill in this part)

0309624.5

28 APR 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Carbonate Limited
85 Richford Street
London W6 7HJ

Patents ADP number (if you know it)

8620312001

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

Fragrance Dispenser

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Mathisen, Macara & Co
The Coach House
6-8 Swakeleys Road
Ickenham
Uxbridge
UB10 8BZ

Patents ADP number (if you know it)

1073001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 12 —

Claim(s) 5 —

Abstract 1 —

Drawing(s) 4 + 4

[Handwritten signature]

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1 —

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

Matthew Maccara & Co.

28 April 2003

12. Name and daytime telephone number of person to contact in the United Kingdom Stephen Knott (01895 678331)

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

FRAGRANCE DISPERSERS

The invention relates to fragrance dispersers.

5 Fragrance dispersers are used to release one or more fragrances into an enclosed space such as a room. In general, the fragrance is held by a fragrance source and released either by natural convection or by forced convection or by heating a wick or pad, for example, holding the fragrance.

10 According to the invention, there is provided a fragrance disperser comprising first and second sources of fragrance, first and second flowpaths, each associated with a respective source of fragrance, a fan for providing a flow of air along the first and second flowpaths to release the associated fragrances and a flow controller movable by an actuator between a first position in which air flows along the first flowpath to
15 allow release of the first fragrance without release of the second fragrance and a second position in which air flows along the second flowpath to allow release of the second fragrance without release of the first fragrance.

The following is a more detailed description of four embodiments of the invention,
20 by way of example, reference being made to the accompanying drawings in which:-

Figure 1 is a top view of a first form of fragrance disperser with a front cover removed

showing a fan, a pivoted shutter in a first position and two passageways including respective sources of fragrance,

Figure 2 is a similar view to Figure 1, but with the shutter in a second position,

5

Figure 3 is a side elevation of the first form of fragrance disperser with a side wall removed, and

Figure 4 is a top view of a second form of fragrance disperser with a cover removed

10

showing a fan, a translating shutter in a first position and two passageways,

Figure 5 is a similar view to Figure 3, showing the shutter in a second position,

Figure 6 is a side elevation of the second form of fragrance disperser with the side

15

wall removed,

Figure 7 is a top view of a third form of fragrance disperser with the front cover

removed showing a fan, a pivoted shutter in a first position and two passageways,

20

Figure 8 is a similar view to Figure 7 but with the shutter in a second position,

Figure 9 is a side elevation of a third form of fragrance disperser with a side wall

removed,

Figure 10 is a top view of a fourth form of fragrance disperser with a cover removed showing a fan, a pivoted shutter in a first position and two passageways,

5

Figure 11 is a similar view to Figure 10 but with the shutter in a second position, and

Figure 12 is a side elevation of the fourth form of fragrance disperser with the side wall removed.

10

Referring first to Figures 1 to 3, the first form of fragrance disperser comprises housing 10 formed by a generally rectangular base 11 (see Figure 3) surrounded by a back wall 12, a front wall 13 and first and second side walls 14,15. The top of the housing is closed by a cover 16 seen in Figure 3.

15

A fan 17 is mounted within the housing rotatable about an axis 18 normal to the base 11. The fan 17 has an outer periphery 19 and is of any suitable conventional type. The interior of the housing is provided with an arcuate wall 20 extending between the first side wall 14, the front wall 13 and the second side wall 14 and defining a chamber which receives the fan 17. The first side wall 14 continues from one end of the arcuate wall 20 and forms one wall of a first passage 21. The remainder of the passage 21 is formed by a portion of the base 11, a portion of the cover 16 and a first

20

interior wall 22 extending from the back wall 12 parallel to the side walls 14,15 towards the fan 17. This is best seen in Figures 1 and 2.

Likewise, the second side wall 15 extends from the other end of the arcuate wall 20 to form a wall of a second passage 23. The other walls of the second passage are formed by portions of the base 11 and the cover 16 and by a second interior wall 24 extending from the back wall 12 parallel to the side walls 14,15 towards the fan 17.

The first passage 21 contains a first fragrance bottle 25 and the second passage 23 contains a second fragrance bottle 26. As seen in Figure 3, each fragrance bottle 25,26 comprises a container 27 containing the fragrance with a cover 28 through which extends a wick 29. The portion of the wick 29 beyond the cover 28 therefore lies in the associated passage 21,23. The first passage 21 includes a first outlet 30 and the second passageway 23 includes a second outlet 31.

As seen in Figure 3, the fan 17 is driven by an electric motor 32 about the axis 18. The motor 32 is carried on an inner dividing wall 33 (see Figure 3) of the housing located between the base 11 and the cover 16 and extending generally parallel to the base 11. The fan 11 is on the cover side of this wall and an actuator 34 is located between the dividing wall 33 and the base 11 (see Figure 3). The actuator 34, which is preferably an electrically operated solenoid, has an output rod 35, best seen in Figures 1 and 2, which is movable between first and second positions. An arm 36 is

rotatably mounted at one end on a fixed pivot 37 adjacent the front wall 13 for movement about an axis parallel to the fan axis 18. The arm 36 extends behind the fan 17 and is fixed at its opposite end to a flow controller in the form of a shutter 38. The shutter 38, as best seen in Figures 1 and 2, includes a generally arcuate wall 39 having an axis coaxial with the pivot 37. The arcuate wall 39 has a first extension surface 40 at one end and a second extension surface 41 at the other end. The function of these extension surfaces 40,41 will be described below.

The rod 35 of the actuator 34 is connected to the arm 36 at a point adjacent the pivot 37.

The fan motor 32 and the actuator 34 are powered from an electrical source (not shown) such as a battery or a mains source. The fan motor 32 and the actuator 34 are controlled by a control system (not shown) to operate as follows.

When the first form of fragrance disperser is initially switched on, power is supplied to the fan motor 32 and to the actuator 34. The fan motor 32 rotates the fan 17 in a clockwise direction as illustrated in Figure 1 and, either before commencement of operation of the fan motor 32 or at the same time, the actuator rod 34 is moved by the actuator 34 to a first retracted position in which the shutter 38 is moved to the position shown in Figure 1. In this position, the arcuate wall 39 forms a continuation of the arcuate wall 20 and provides a downstream continuation of the passage between the

arcuate housing wall 20 and the outer periphery 19 of the fan 17 which increases in cross-section in a downstream direction. This provides a scrolled flowpath for air around the rotating fan 17. At the same time, the first extension surface 40 bears against the first side wall 14 while the second extension surface 41 engages the end of the second internal wall 24 adjacent the fan 17 to provide a continuation of the first passage. In this way, the first passage 21 is opened and the second passage 23 is closed so that air from the fan 17 passes through the first passage 21 to release fragrance from the wick 29 of the first fragrance bottle 25.

After a predetermined time has elapsed, during which time the fan motor 32 may be halted, the control system reverses the direction of rotation of the fan motor 32 and thus of the fan 17. At the same time, the actuator 34 is operated to extend the actuator rod 35 and move the shutter 38 from the first position shown in Figure 1 to the second position shown in Figure 2. In this position, the shutter 38 opens the second passage 23 and closes the first passage 21. The first extension surface 40 bears against the first side wall 14 while the second extension surface 41 engages the second interior wall 24 to form a continuation of the second passage 23. The arcuate shutter wall forms a downstream extension of the passage around the fan 17 which is of increasing cross-section in a downstream direction. Thus, air from the fan is diverted through the second passage 23 and past the wick 29 of the second fragrance container 26 while the first passage 21 is closed. This releases the second fragrance into the atmosphere.

Various modes of operation of a fragrance disperser of this general kind are described in our PCT Application GB 2002/004520.

Referring next to Figures 4-6, a second form of fragrance disperser has parts common with Figures 1 to 3. Those parts will be given the same reference numerals as the corresponding parts in Figures 1 to 3 and will not be described in detail.

In the second form of fragrance disperser, the actuator 34 is located adjacent the back wall 12 to one side of the fan 17 as seen in Figure 6. An arm 45 is mounted intermediate its ends on a fixed pivot 46 for rotation about an axis parallel to the fan axis 18 and is provided at one end with a fork 47 and at the other end with a slot 48. The slot 48 receives a pin 49 on the rod 35 and extending normal to the length of the rod 35. The fork 47 engages a second pin 50 carried on a boss 51 formed centrally on a shutter 52. As seen in Figure 6, the boss 51 includes a flange 53 that engages in a slot 54 formed in the housing 10 to constrain the shutter 52 to move in a rectilinear direction normal to the first and second side walls 14,15. The shutter 52 has an arcuate shutter wall 55 with a first extension surface 56 at one end and a second extension surface 57 at the other end. Of course, the connection between the arm 45 and the pin 50 on the boss 51 need not be via the fork 47. Any suitable connection, such as a slot, maybe used.

The housing 10 is modified by the replacement of the planar front wall 13 with an

arcuate front wall 58 which forms not only the front wall but also the equivalent of the arcuate housing wall 20 of Figure 1, as seen in Figures 4 and 5.

5 In use, the motor 32 and the actuator 34 are operated as described above. When the actuator rod 35 is in the first retracted position, the shutter 52 is in the position shown in Figure 1 where the first end of the arcuate shutter wall 55 engages the second side wall 15 to close the second passage 23 and open the first passage 21. In this position, the second extension surface 57 engages the first interior wall 22 to form an extension of the first passage 21. In addition, the arcuate shutter wall 55 forms a continuation
10 of the passage around the fan 15 providing a passage of increasing cross-section in a downstream direction. Thus air passes to the first fragrance bottle (omitted for clarity from Figures 4 to 6) to release fragrance while the second passage 23 is closed.

Reversal of the fan motor 32 and extension of the actuator rod 35 rotates the arm 45
15 around the pivot 46 with the fork 47 acting on the pin 50 to slide the boss 51 along the slot 54 to move the shutter 52 to the position shown in Figure 5 where the shutter 52 closes the first passage 21 and opens the second passage 23 with the second extension surface engaging the second interior wall 24 and forming an extension of the second passage 23. In addition, the arcuate shutter wall 55 forms a continuation of the
20 passage around the fan 17 that increases in cross-section in a downstream direction.

The effect of this is shown in Figure 5 with the second passage 23 closed and the first

passage 21 closed with the second passage 23 open. The end of the shutter wall 55 engages the first side wall 14 and the shutter wall forms a downstream extension of the passage around the fan 17 which decreases in cross-section in a downstream direction. The second extension surface 57 forms a continuation of the second passage 23. Accordingly, the air flow generated by the fan 17 passes along the second passage 23 where it releases fragrance from the wick 29 and passes the fragrance through the associated outlet 31.

The change in rotation of the motor 32 and the operation of the actuator 34 are controlled as described above.

Referring next to Figures 7 to 9, the third embodiment of the fragrance disperser has parts common with the second fragrance disperser. Those parts will be given the same reference numerals in the third fragrance disperser as in the second fragrance disperser and will not be described in detail.

In the third fragrance disperser, the actuator 34 is situated as described above with reference to Figures 4 to 6. However, the connection between the actuator rod 35 and the shutter 52 is formed by a pair of parallel arms 60,61. Each arm 60,61 is at one end formed integrally with the shutter 52 to provide respective hinges 62,63 between the shutter 52 and the arm 60,61. For example, the parts may be moulded together from a plastics material. The arms 60,61, at their ends opposite the shutter 52, are rotatably

mounted on respective pivots 64,65 for rotation about respective axes parallel to the axis 18 of the fan 17. The arms 60,61 are parallel to one another. One arm 60 is formed with an extension 66 beyond the associated pivot 64 which is provided with a slot 67 receiving the pin 49 on the actuator rod 35.

5

The fragrance disperser of Figures 7 to 9 operates in a similar way to the fragrance disperser of Figures 4 to 6. When the actuator rod 35 is in the retracted position shown in Figure 7, the shutter 52 closes the second passage 23 and opens the first passage 21 as described above. Movement of the actuator rod 35 to the extended position shown in Figure 8 moves the shutter 52 to the position shown in Figure 8 where the first passage 21 is closed and the second passage 23 is open. In contrast with the second form of the fragrance disperser, the shutter 52 in the third form of fragrance disperser is not guided in rectilinear movement between the position shown in Figure 7 and Figure 8. Rather, the shutter 52 is guided by the parallel arms 60,61.

15

Referring next to Figures 10 to 12, the fourth form of the fragrance dispersing device has parts common with the second and third forms of the fragrance disperser shown in Figures 4 to 6 and 7 to 9. Those parts will be given the same reference numerals in Figures 10 to 12 as they are in Figures 4 to 9 and will not be described in detail.

20

In the embodiment of Figures 10 to 12, the actuator 34 is located at a position somewhat spaced from the back wall 12 as seen in Figures 10, 11 and 12. The shutter

52 is formed in one piece with an arm 70 that extends in a generally radial direction relative to the centre of curvature of the arcuate shutter wall 55 and thus generally radially relative to the axis 18 of the fan 17. The arm 70 has an end remote from the shutter 52 rotatable about an axis parallel to the fan axis 18 about a fixed pivot 71.

5 Intermediate its ends, the arm 70 is provided with an elongated slot 72 that engages the pin 49 on the actuator rod 35. The arm 70 is also provided with two L-shaped spring arms 74 projecting from respective opposite sides of the arm 70 for co-operation with two stops 73 provided on the casing 11 in a manner to be discussed below.

10

The fan motor 32 and the actuator 34 are operated as described above. When the actuator 34 is in the extended position shown in Figure 10, the shutter 52 closes the second passage 23 and opens the first passage 21 so that fan air passes through the first passage 21 releasing fragrance. When the actuator rod 35 is moved to the retracted position shown in Figure 11, the shutter 52 moves to the position shown in Figure 11 where the first passage 21 is closed and the second passage 23 is opened so that fan air exits through the second passage 23 to release fragrance. As the arm 70 pivots in either sense one of the spring arms 74 engages a respective stop 73 to provide spring damping of the movement of the arm 70 to avoid noise due to vibration/rattling.

15

20

The use of a shutter 38,52 to control the release of two fragrances has been described above with reference to the drawings in relation to a fan that is reversible. It will be appreciated that the fan 17 need not be reversible; the fan 17 could provide a continuous supply of air on rotation in a single sense only and the shutters 38,52 simply open and close the first and second passages 21,23 with the arrangement of the passages 21,23 and the shutter 38,52 being altered accordingly. In addition, although, in the embodiments of Figures 1 to 12, the flow control of the air is performed by a shutter 38,52, it is possible to control the flow by means other than a shutter. For example, two separate shutters may be provided or the passages 21,23 may be opened and closed by other means such as louvres. In addition, although in the embodiments described above with reference to the drawings, the shutters 38,52 move between extreme positions, the shutters 38, 52, could move to one or more positions between the extreme positions to provide a required proportionate mixture of the fragrances.

The embodiments described above with reference to Figures 1 to 12 use an electronically operated actuator 34 which extends and retracts a rod 35. The actuator could take any other form including a hydraulic actuator or any other suitable form of actuator.

CLAIMS

1. A fragrance disperser comprising first and second sources of fragrance, first and second flowpaths, each associated with a respective source of fragrance, a fan for providing a flow of air along the first and second flowpaths to release the associated fragrances and a flow controller movable by an actuator between a first position in which air flows along the first flowpath to allow release of the first fragrance without release of the second fragrance and a second position in which air flows along the second flowpath to allow release of the second fragrance without release of the first fragrance.

2. A disperser according to claim 1 wherein the first and second flowpaths comprise respective first and second passages, the flow controller opening the first passage and closing the second passage in the first position thereof and closing the first passage and opening the second passage in the second position thereof.

3. A disperser according to claim 2 wherein the first passage has an inlet end adjacent the fan and the second passage has an inlet end adjacent the fan, the flow controller opening and closing said inlet ends.

4. A disperser according to any one of claims 1 to 3 wherein the fan is rotatable in respective opposite first and second senses, rotation of the fan in the first sense passing air through the first flowpath with the flow controller in the first

position and rotation of the fan in the second sense with the flow controller in the second position passing air through the second flowpath.

5. A disperser according to claim 4 and comprising control means for
5 controlling the actuator and the fan so that the flow controller is in first position when the fan rotates in said first sense and the flow controller is in said second position when the fan rotates in said second sense.

6. A disperser according to claim 4 or claim 5 wherein the fan is within a
10 housing, the housing including a wall extending around the fan and defining a path for air leading to the first flowpath and the second flowpath, the flow controller including a flow directing surface which, in both the first position and the second position, provides a downstream extension of said housing wall.

15 7. A dispenser according to claim 6 wherein the fan has an outer periphery, the housing wall being arcuate about an axis co-axial with the axis of rotation of the fan, the flow directing surface being arcuate and forming, with the outer periphery of the fan, a passage of increasing cross-section in a downstream direction.

20 8. A dispenser according to claim 6 or claim 7 wherein the flow controller includes a first extension surface which forms a continuation of the first flowpath when the flow controller is in said first position and a second extension surface which

forms a continuation of the second flowpath when the flow controller is in said second position.

9. A disperser according to any one of claims 1 to 8 wherein said actuator is
5 connected to the flow controller by a mechanism that translates operation of actuator into movement of the flow controller between said first and second positions.

10. A disperser according to claim 9 wherein the mechanism includes at least one arm connected between the flow controller and the actuator.

10 11. A disperser according to claim 10 wherein the actuator includes a rod movable between first and second positions to cause the at least one arm to move the flow controller between the first and second positions.

15 12. A disperser according to claim 11 wherein the at least one arm is pivotally mounted, movement of the rod rotating the at least one arm around the pivot.

13. A disperser according to claim 12 wherein the at least one arm has a first end and a second end, the first end being fixed to the flow controller and the second
20 end being pivotally mounted, the rod acting on the arm intermediate the ends thereof.

14. A disperser according to claim 13 wherein the arm extends away from the

fan in a generally radial direction.

15. A disperser according to claim 13 wherein the arm is pivoted to one side of the fan and the flow controller is on a diametrically opposite side of the fan, the arm
5 extending across the fan.

16. A disperser according to claim 12 wherein the arm has a first and a second end and is pivotally mounted intermediate the first and second ends, the first end being pivotally connected to the flow controller and the second end being pivotally
10 connected to the rod.

17. A disperser according to claim 16 wherein the arm extends away from the fan in a generally radial direction.

15 18. A disperser according to claim 11 wherein said at least one arm is one of two parallel arms, each arm having a first end and a second end, the first ends of the arms being pivotally connected to the flow controller and the second ends of the arms being connected to spaced fixed pivots, the rod acting on one of said arms.

20 19. A disperser according to any one of claims 1 to 18 wherein the fan is within a housing, the housing including a chamber housing the fan and first and second passages leading from the housing and forming respectively the first and second

flowpaths.

20. A disperser according to claim 19 wherein the chamber includes an arcuate wall partially surrounding the fan, the arcuate wall having a first end and a second end, the first passage leading from the first end of the arcuate wall and the second passage leading from the second end of the arcuate wall.

21. A disperser according to claim 19 or claim 20 wherein the first and second passages are side-by-side in the housing.


22. A disperser according to any one of claims 1 to 21 wherein the actuator is electronically operated.

23. A dispenser according to any one of claims 1 to 22 wherein the flow controller is movable by the actuator to at least one position between said first and second positions to provide proportionate increase of both fragrances.

24. A disperser substantially as hereinbefore described with reference to the accompanying drawings.

ABSTRACTFRAGRANCE DISPERSERS

A fragrance disperser includes a first source of fragrance associated with a first
5 flowpath and a second source of fragrance associated with a second flowpath. A fan
is provided for providing a flow of air along the first flowpath or the second flowpath
to release the associated fragrance. A flow controller is movable by an actuator to
open and close the flowpaths so that only one fragrance is released at a time or a
proportionate mixture of the two fragrances is released.

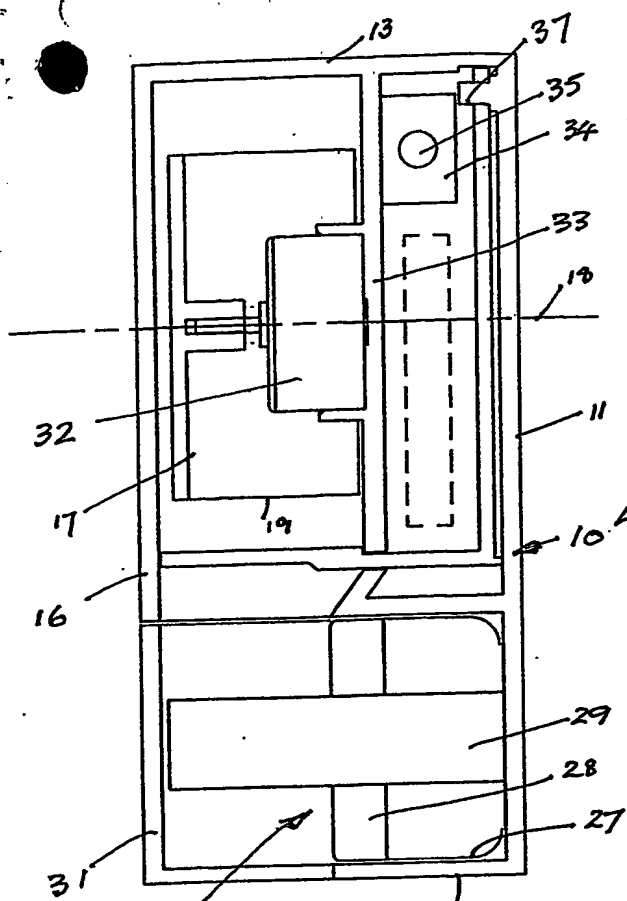

26 FIGURE 3 12

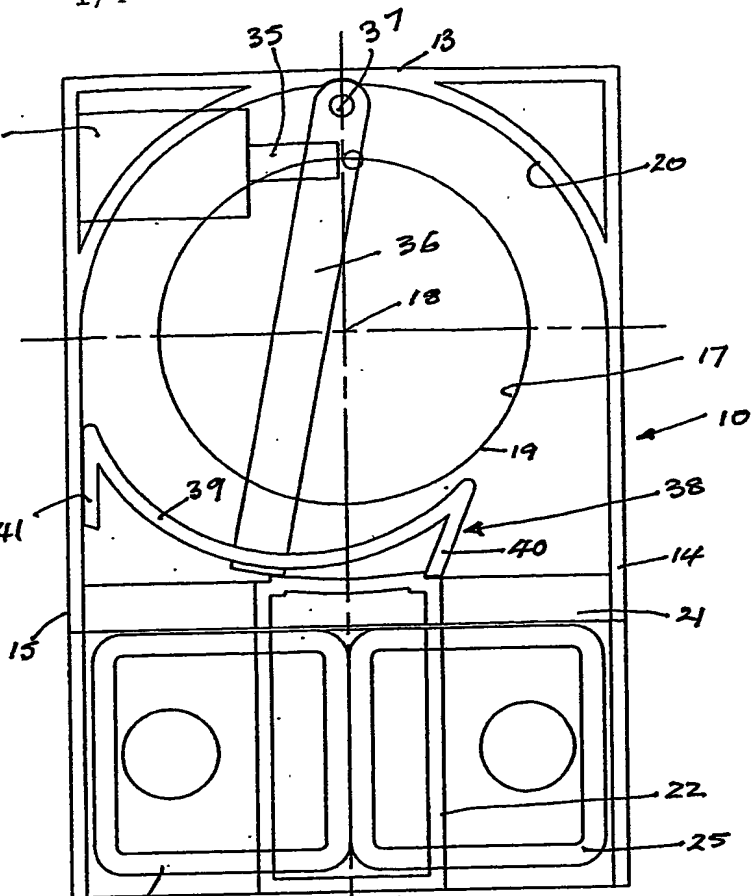


FIGURE 1

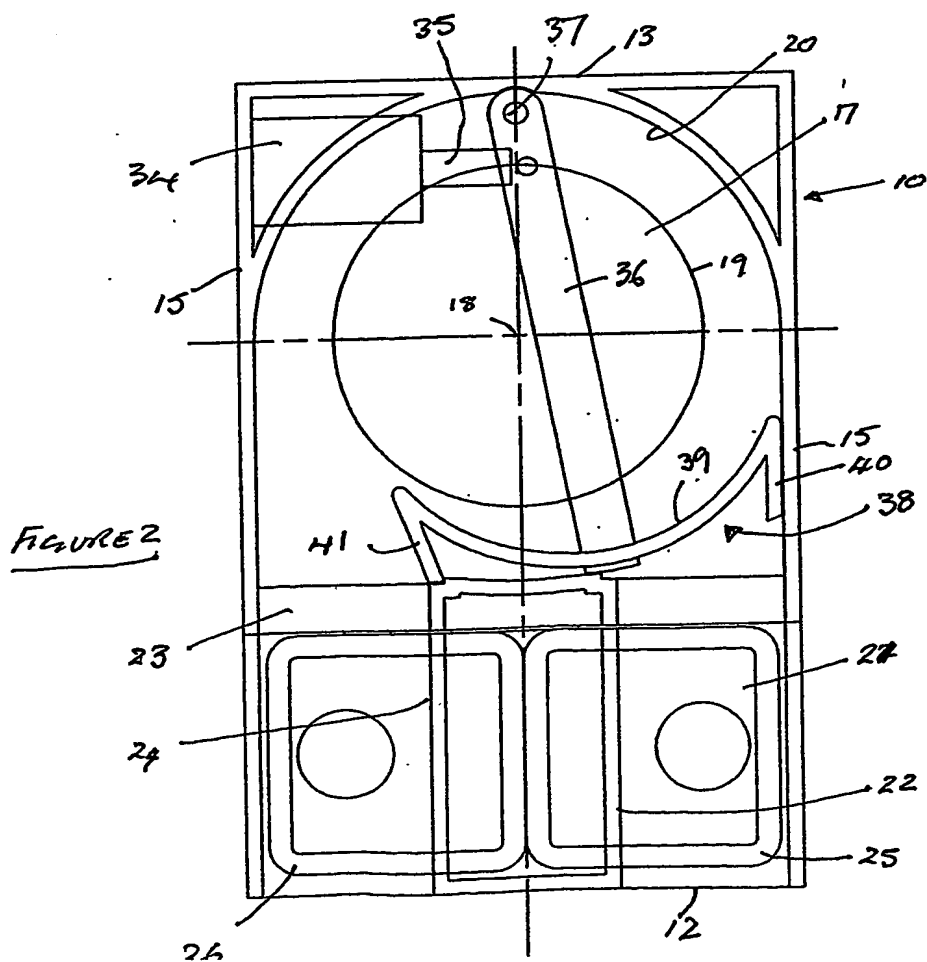


FIGURE 2

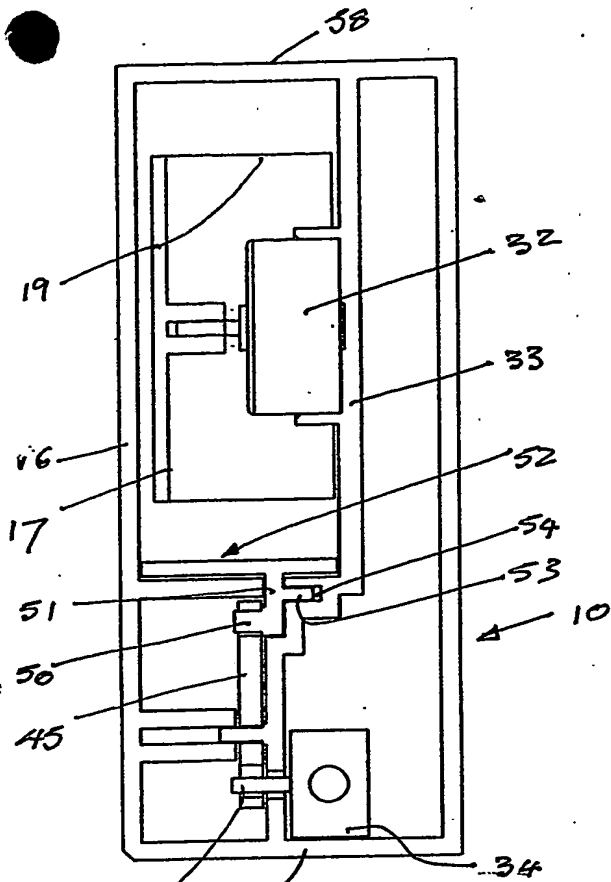


FIGURE 6

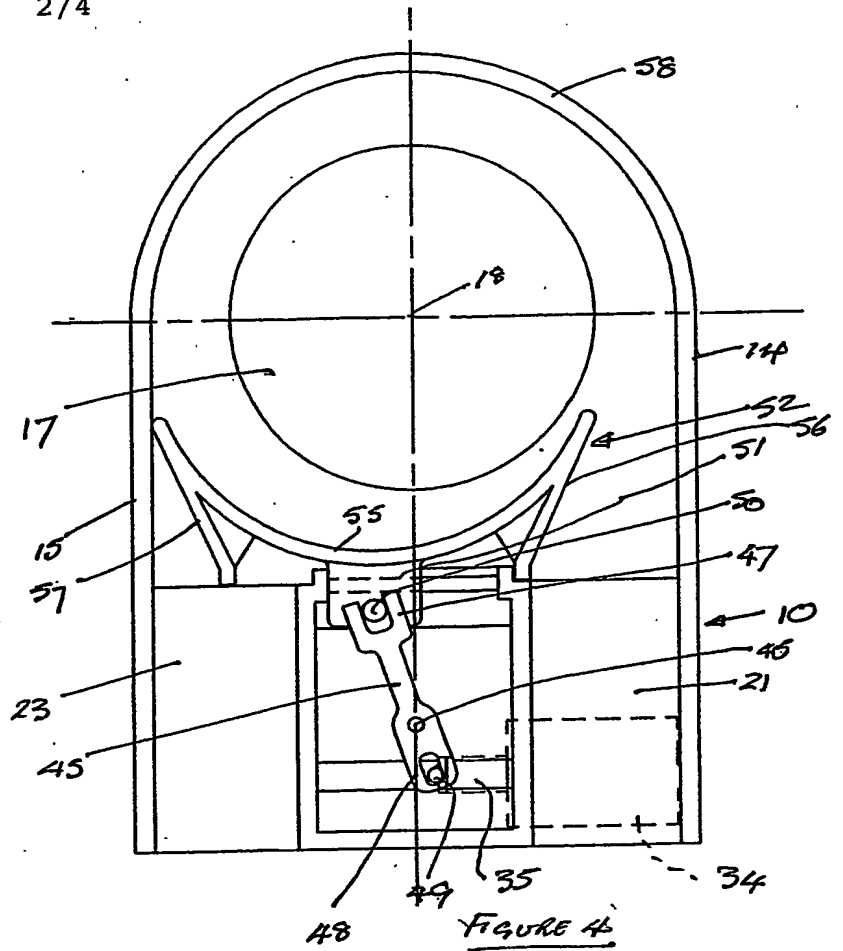


FIGURE 4


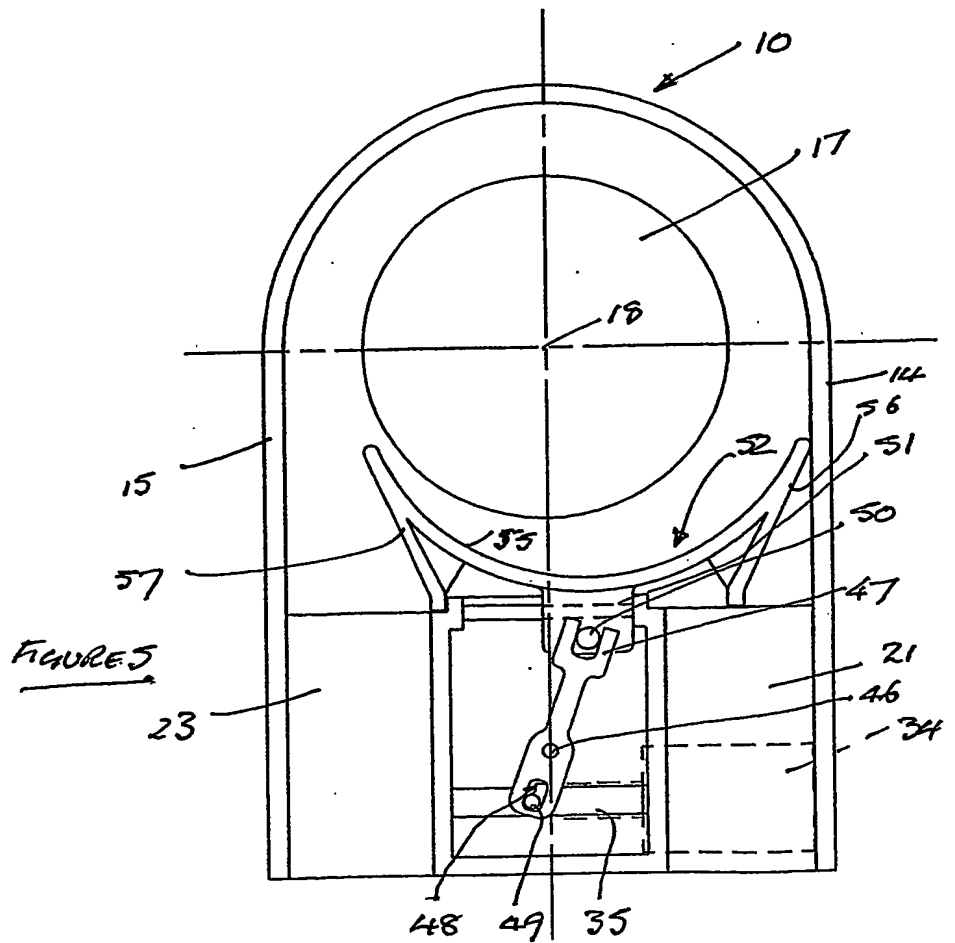


FIGURE 5

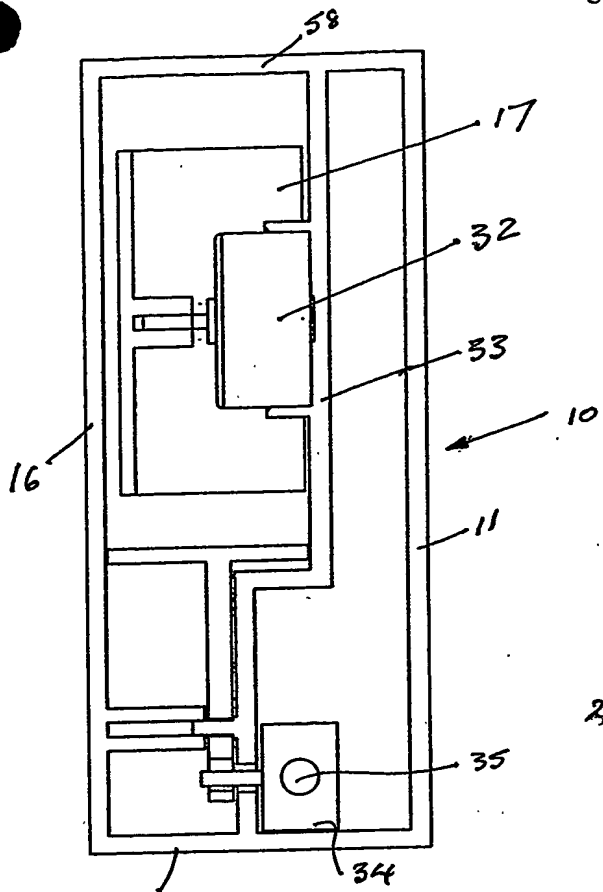

12 FIGURE 9

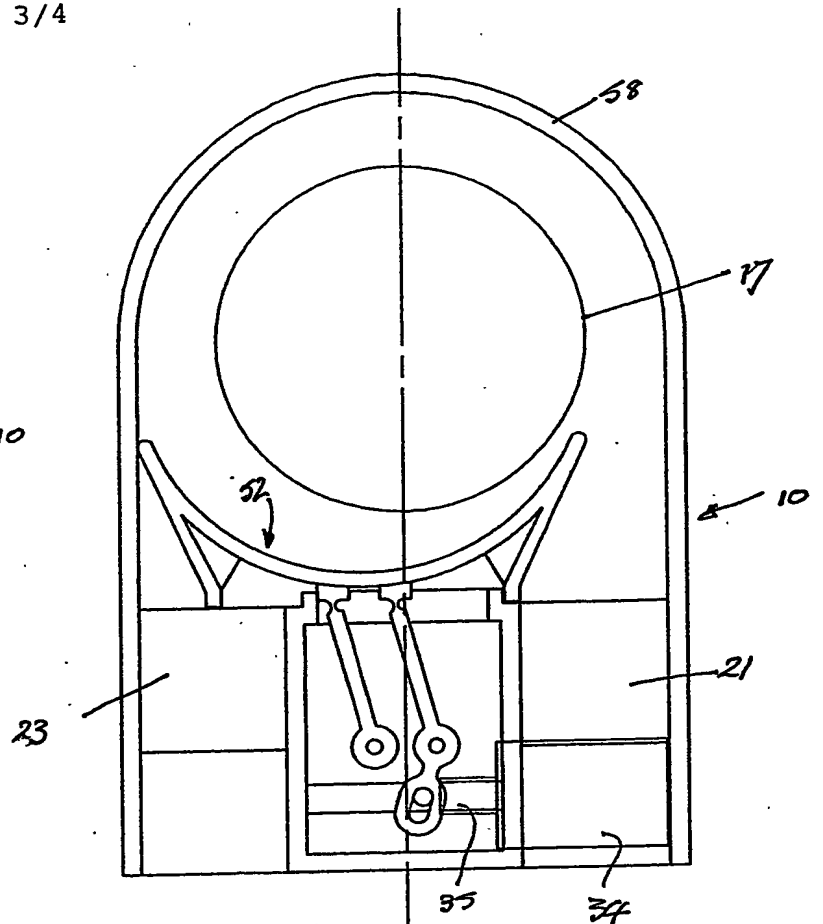


FIGURE 7




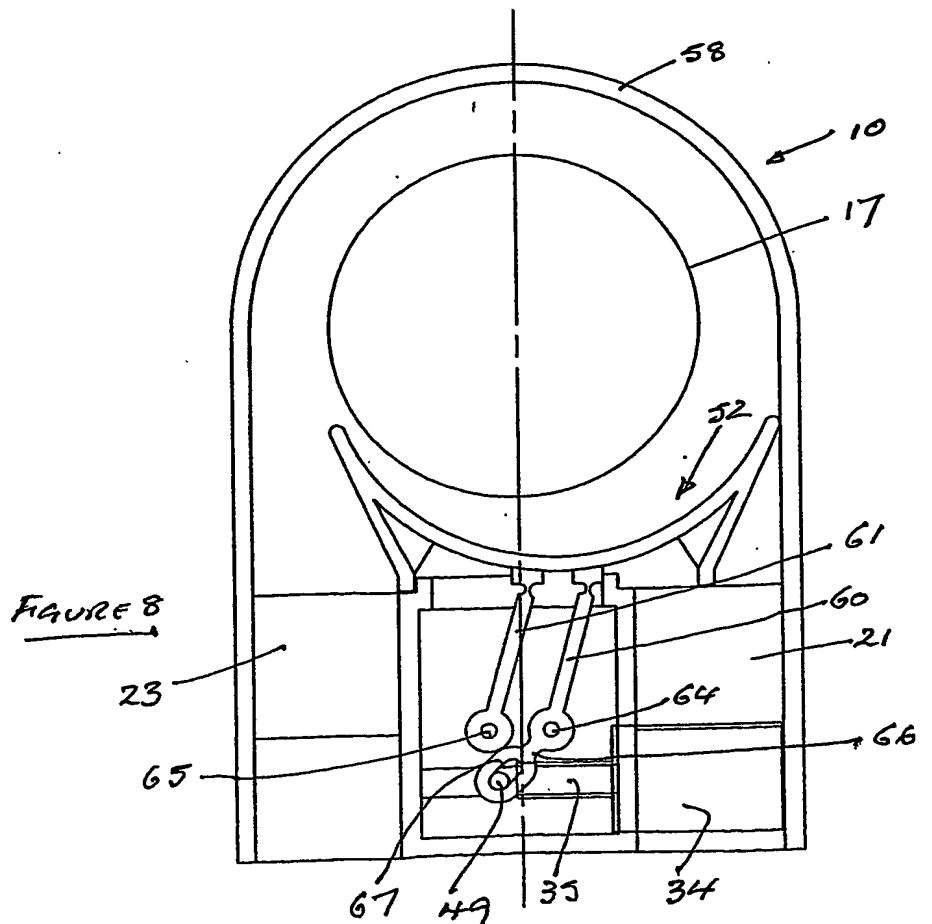


FIGURE 8

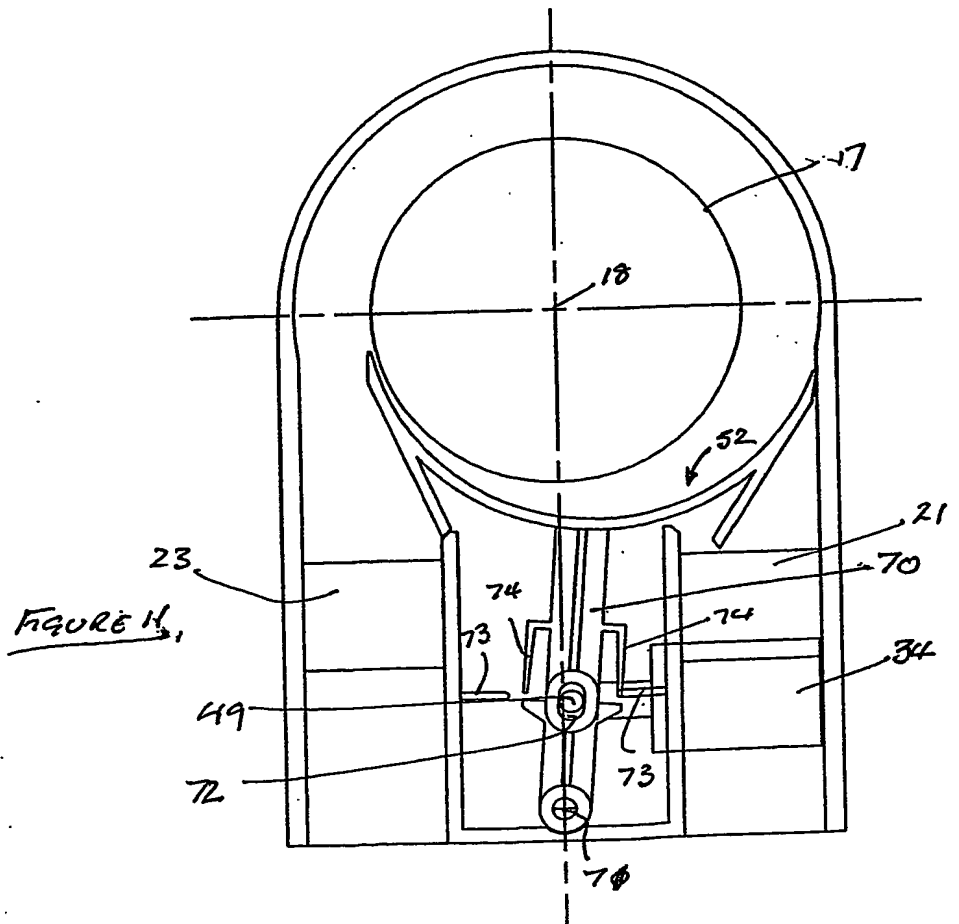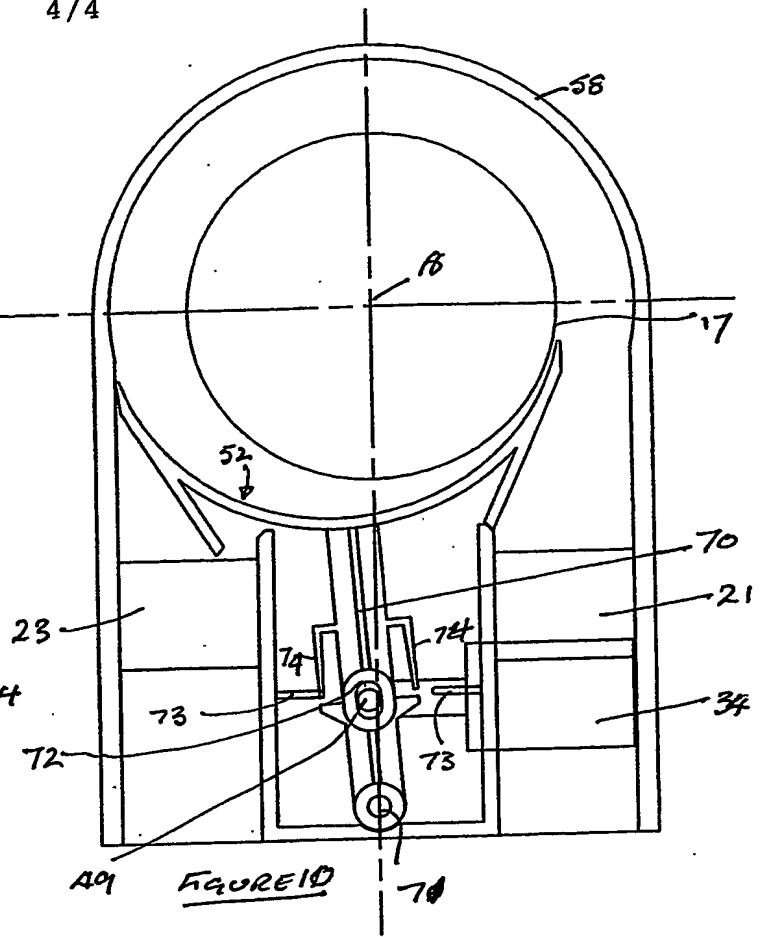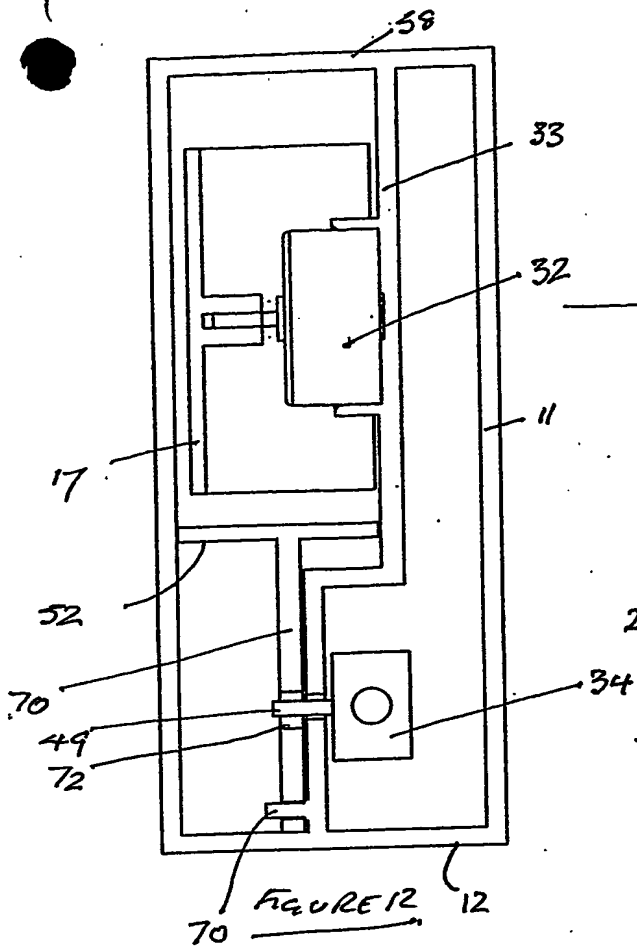

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.